


# StarKids Wooden Door Barrier

## Part Names

Wingnut

Rubber-tipped Bolt

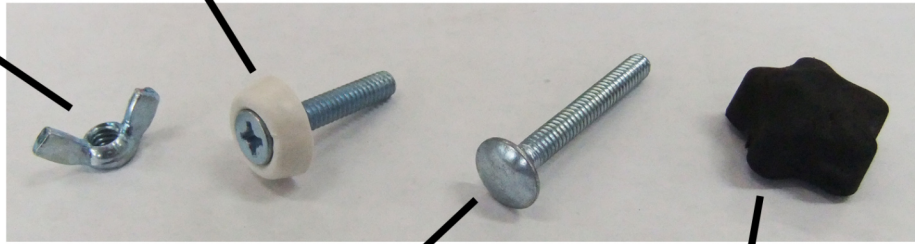

Long bolt


Tightening nut

The quantity of parts depends on your size of door barrier: for each rubber-tipped bolt there is one wingnut, and for each long bolt there is one tightening nut.

Panel with Holes




Panel with Extender Slots

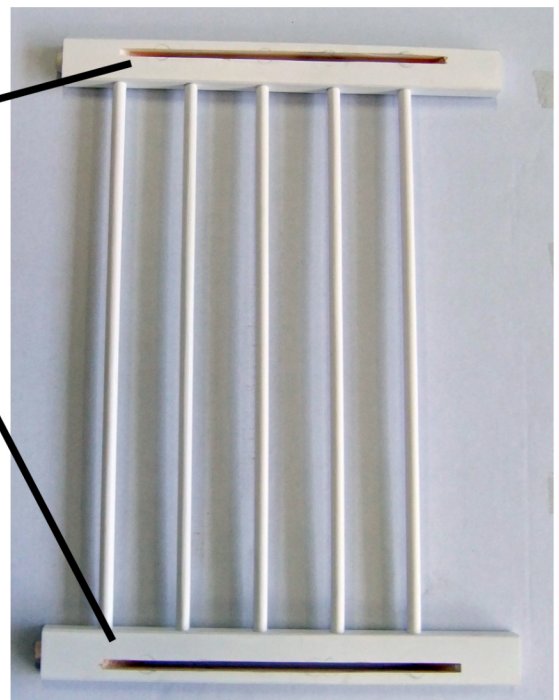


# Assembly Instructions



For each pair of wingnut and rubber-tipped bolt, put the wingnut onto the bolt with the wings facing 'along' the bolt.

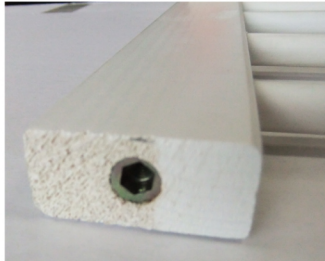

Find the panel with holes in the end for the wingnut-bolts

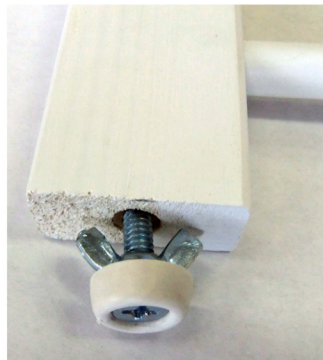


Screw the bolt in as far as it will go - it will not go in all the way. only approximately half the length of the bolt



Line up the holes in one panel with the extender slots in the other panel, and insert the long bolt through the hole.

Apply the tightening nut to the exposed end of the long bolt, and gently tighten.

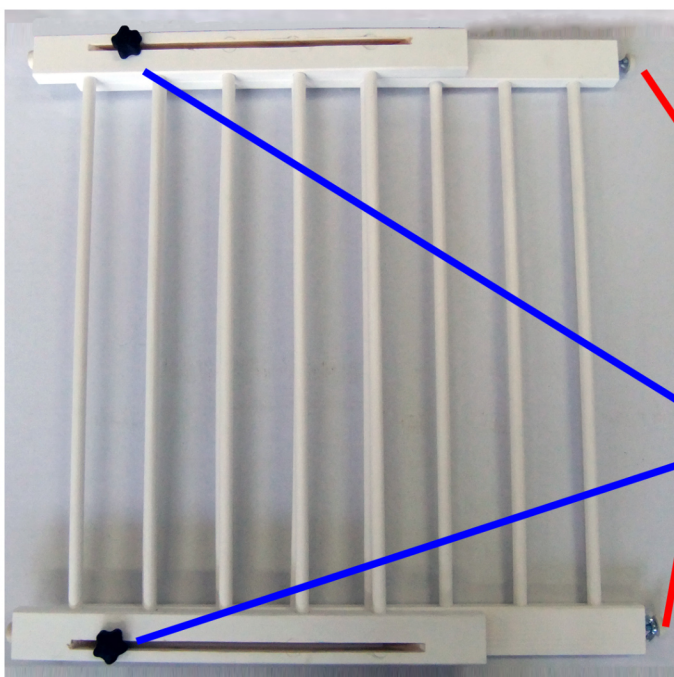

Your barrier is now assembled.  
See the next page of instructions for help installing your barrier.

Wingnut/bolt


Tightening nut/long bolt



# Installation Instructions



With the barrier at its smallest size, position it in place.

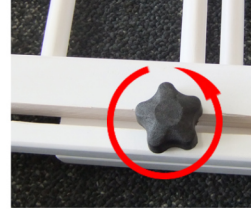

Undo the tightening nut to allow the barrier to extend into place.



Extend barrier as wide as it will go.

Tighten the black tightening nuts to lock it at that length.

Twist the wingnuts to extend the bolts outwards and increase pressure to secure the barrier in place.

